

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
25 August 2005 (25.08.2005)


PCT

(10) International Publication Number
WO 2005/078692 A1

- (51) International Patent Classification⁷: **G09G 3/34** (72) Inventors; and
(75) Inventors/Applicants (for US only): **ZHOU, Guofu**
[NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven
(21) International Application Number: **PCT/IB2005/050501** (NL). **JOHNSON, Mark T.** [NL/NL]; Groenewoudseweg
1, NL-5621 BA Eindhoven (NL).
(22) International Filing Date: 8 February 2005 (08.02.2005) (74) Common Representative: **KONINKLIJKE PHILIPS**
ELECTRONICS, N.V.; c/o Frank Keegan P.O. Box 3001,
Briarcliff Manor, NY 10510-8001 (US).
(25) Filing Language: English
(26) Publication Language: English (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.
(30) Priority Data: 60/543,730 11 February 2004 (11.02.2004) US
(71) Applicant (for all designated States except US): **KONIN-
KLJKE PHILIPS ELECTRONICS, N.V.** [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
(71) Applicant (for AE only): **U.S. PHILIPS CORPORA-
TION** [US/US]; 1251 Avenue of the Americas, New York,
NY 10020 (US). (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: ELECTROPHORETIC DISPLAY WITH CYCLIC RAIL STABILIZATION

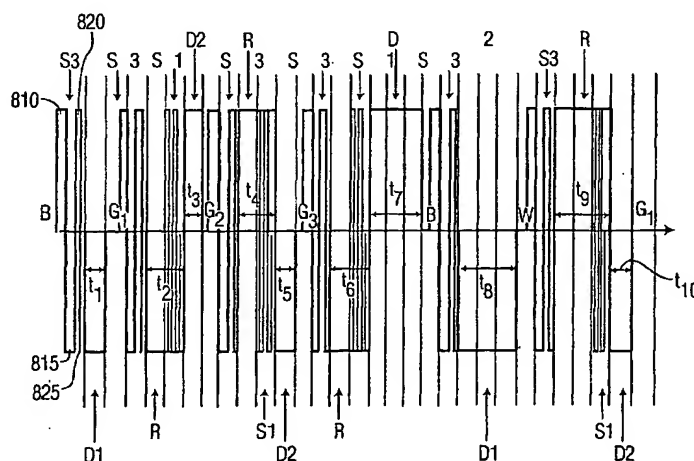

(57) Abstract: An image is updated on a bi-stable display (310) such as an electrophoretic display by using cyclic rail-stabilized driving, where an image transition is realized either directly via a single drive pulse (D1), or indirectly via a reset pulse (R) and a drive pulse (D2) of opposite polarity. First shaking pulses (S1) are applied to the bi-stable display, when the at least one image transition is realized indirectly, e.g., during at least a portion of the reset pulse and/or the drive pulse of opposite polarity. Furthermore, second shaking pulses (S2) are applied prior to the single drive pulse, or prior to the reset pulse and the drive pulse of opposite polarity. The shaking pulses in either case may include initial shaking pulses (810, 820) and final shaking pulses (815, 825), which have a reduced energy.

WO 2005/078692 A1